

LED A19

Non-Dimmable / Battery Backup

Benefits:

- Stays lit during power outages to provide light to important areas
- Turns off when unplugged or turned off
- Provides 3.5 hours of backup light
- Helps prevent accidents due to loss of light

Features:


- Recharges using the power current from standard light socket
- Integrated Lithium-Ion backup battery
- Exceptional color rendering – CRI 83
- RoHS compliant with no lead or mercury
- This device complies with part 15 of the FCC Rules
- Durable, shatter resistant construction
- Suitable for use in totally enclosed fixture
- Standard E26 base

Energy Usage	9 Watts
Lumens	500/300 BBUP
CRI	83
CCT	2700/3000/5000K
Beam Angles	125°
Efficacy	65 LPW
Base Type	E26
Voltage	120V
Dimming	Non-Dimmable
Classification	Damp Rated
Operating Temperature	-4 to 104°F
Power Factor	0.9



Applications:

- Table lamps, floor lamps, pendants or any other places a standard incandescent bulb would be used
- General lighting
- Great for hospitality, restaurants, homes, multifamily, senior care, cash wrap areas and other commercial segments

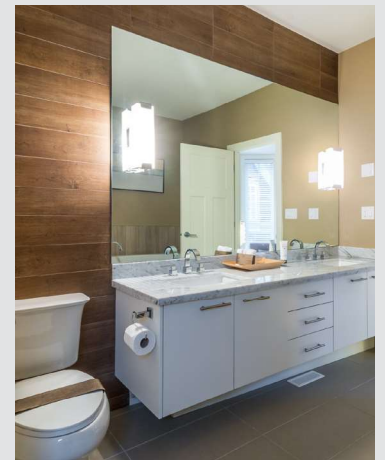


Color:

- Strict LED binning for consistent CCTs across all lamps
- Available in 2700K, 3000K & 5000K CCT
- CRI 83

LIFE: **25,000 HOURS**



LED A19

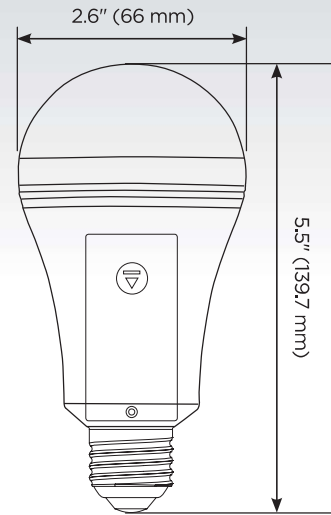

Weight: 0.48 lb / 220g

Type	Voltage (V)	Wattage (W)	Base	Light Output AC Power (lm)	Light Output BBUP (lm)	Battery Type	Color Temp. (k)	CRI (Ra)	Beam Angle \angle°	Equal (W)	Product Description	Master Carton Quantity (PCS)
A19	120	9	E26	500	300	1200mAh Rechargeable lithium-ion	2700	83	125	40	EB-A19NA27KE26W	20
A19	120	9	E26	500	300	1200mAh Rechargeable lithium-ion	3000	83	125	40	EB-A19NAE26W	20
A19	120	9	E26	500	300	1200mAh Rechargeable lithium-ion	5000	83	125	40	EB-A19NA50KE26W	20